



SOLID WASTE ENCLOSURES

NOTE:


1. MINIMUM **INTERIOR** ENCLOSURE DIMENSIONS FOR TWO, FOUR AND SIX CUBIC YARD FRONTLOAD SOLID WASTE BINS.
2. CLEARANCES ARE **INTERIOR** CLEAR MEASUREMENTS FROM BIN TO FACE OF ENCLOSURE WALL OR TO POSTS WHICHEVER IS SMALLER AND FROM BIN TO BIN.
3. PROVIDE GATE STOPS ON ALL GATES IN OPEN POSITION.
4. CONSTRUCT POSTS, RAIL OR CURB ACROSS THE BACK OF THE ENCLOSURE FOR MINIMUM CLEARANCE FROM BACK WALL OR FENCE.
5. ALL CONCRETE FLOORS AND CONCRETE APRON SHALL BE 8" THICK AND LEVEL SIDE TO SIDE.
6. MINIMUM CLEAR OPENING WIDTH IN FRONT OF EACH DUMPSTER IS ELEVEN FEET FOUR INCHES (11'-4")
7. ENCLOSURES SHALL BE A MINIMUM 6 FEET IN HEIGHT
8. REQUIRED ACCESS AND TURNAROUND SPACE CANNOT CROSS IDENTIFIED PARKING SPACES (SEE OTHER SIDE FOR MINIMUM DIMENSIONS OF ACCESS/TURNAROUND)
9. ENCLOSURES FOR SOLID WASTE BINS ONLY. NO OTHER STORAGE.
10. MINIMUM TWO FEET (2') CLEARANCE SIDES AND REAR REQUIRED TO SERVICE BINS.

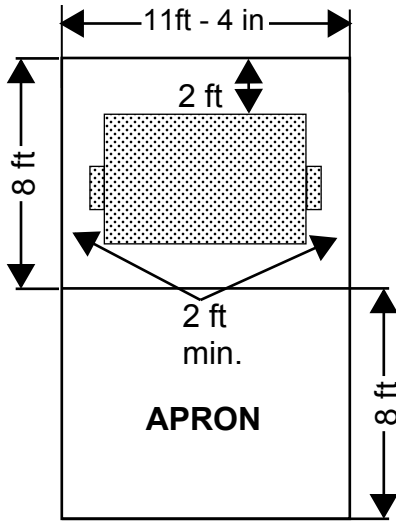


SINGLE BIN ENCLOSURE

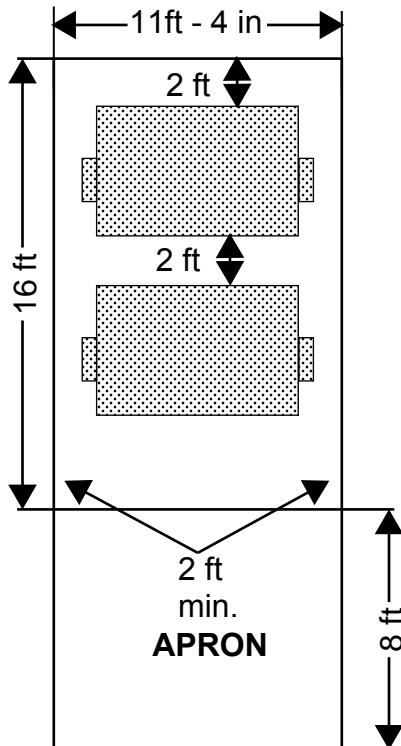

TWO BIN ENCLOSURE

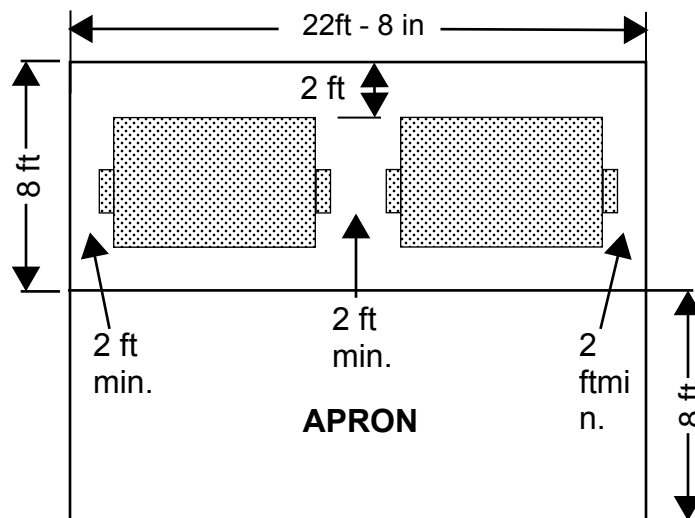

**ALTERNATIVE TURNAROUND
FOR DEAD ENDS EXCEEDING
150 FEET
MINIMUM REQUIREMENTS**

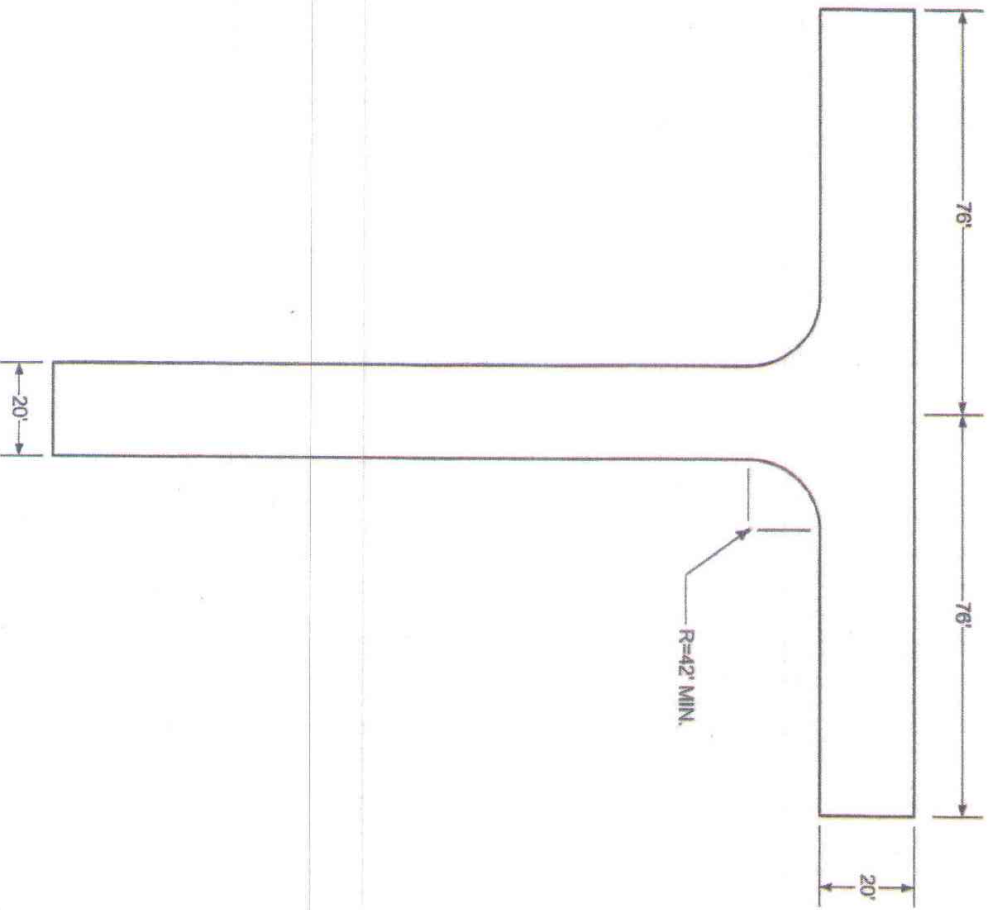

**MINIMUM CUL-DE-SAC TURN
RADIUS REQUIREMENTS**

